

www.ijprems.com editor@ijprems.com INTERNATIONAL JOURNAL OF PROGRESSIVE RESEARCH IN ENGINEERING MANAGEMENT AND SCIENCE (IJPREMS) e-ISSN : 2583-1062

Impact Factor : 5.725

Vol. 03, Issue 02, February 2023, pp : 212-219

HEALTH MONITORING AND MANAGEMENT USING IOT

Shruti Mehra¹

¹Student ECE Department, Sharda University, Gautam Budh Nagar, UP, India.

DOI: https://www.doi.org/10.58257/IJPREMS30657

ABSTRACT

Life expectancy in most countries has been increasing continually over the several few decades by significant improvements in medicines, public health as well as personal and environmental hygiene. However, increased life expectancy combined with falling birth rates. So, this is essential to develop cost-effective, easy to use systems for the sake of elderly healthcare and well-being. The Internet of things (IOT) makes smart objects the ultimate building blocks in the development of cyber-physical smart pervasive frameworks. The IOT has a variety of application domains, including healthcare. The IOT in modern healthcare is promising technological, economic and social prospects. This report includes advantages of existing IOT based health monitoring devices and advances of IOT based healthcare technologies which is beneficial for elderly people.

Keywords: Analysis, Programming, Research, Methodology, Audino-nano.

1. INTRODUCTION

1.1 What is an IOT?

IOT' stands for internet of things is a system of interrelated computing devices, mechanical and digital machines, objects or people that are provided with unique identifiers and the ability to transfer data over a network without requiring human to human or human to computer interaction. Life expectancy has been increasing worldwide due to significant improvements in healthcare, and medicine as well as due to growing consciousness about personal and environmental hygiene. In addition, over the past several decades, there has been increasing interest in family planning thereby contributing to declining birth rates around the globe. According to the World Health Organization (WHO), by 2017, the elderly population over 65 years or older are expected to outnumber the children less than 5 years of age. However, this enormous aging population would create a significant impact on the socio-economic structure of society in terms of social welfare and healthcare needs. Besides, this, the cost associated with healthcare services continues to soar because of increasing price of prescription drugs, medical instruments, and hospital care. Therefore, it is an utmost necessity to develop and implement new strategies and technologies in order to provide better health care services at an affordable price to the aging population or to the people of those areas having limited access to healthcare while ensuring maximum comfort, independence, participation among the people.

Remote healthcare monitoring allows people to continue to stay rather than in expensive healthcare facilities such as hospitals or nursing homes. It thus provides an efficient and cost effective alternative to on site clinical monitoring. Such systems equipped with non-invasive and unobtrusive wearable sensors can be viable diagnostic tools to the healthcare personnel for monitoring important physiological signs and activities of the patients in real time from distant facility. Therefore, it is understandable that wearable sensors play a critical role in such monitoring systems that attracted the attention of many researchers, entrepreneurs, and tech giants in recent years. A variety of application specific wearable sensors, physiological and activity monitoring systems.

Wearable devices can monitor and record real time information about one's physiological condition and motion activities. Wearable sensor-based health monitoring systems may comprise different types of flexible sensors that can be integrated into textile fiber, clothes, elastic bands or directly attached to human body. The sensors are capable of measuring physiological signs such as electrocardiogram (ECG), electromyogram (EMG), heart rate (HR), body temperature , electro dermal activity(EDA), arterial oxygen saturation(SpO2), blood pressure(BP), and respiration rate(RR). In addition, micro electro mechanical system (MEMS) based miniature motion sensors such as accelerometers, gyroscopes, and magnetic field sensors are widely used for measuring activity related signals. Continuous monitoring of physiological signals could help to detect and diagnose several cardiovascular, neurological, and pulmonary diseases at early onset. Also, real time monitoring of individual motion activities could be useful in fall detection gait pattern and posture analysis, or in sleep assessment. The wearable health monitoring systems are usually equipped with a variety of electronic and MEMS sensors, actuators, wireless communication modules and signal processing units. The measurements obtained by the sensors connected in a wireless body sensor network(BSN) are transmitted to nearby processing node using a suitable a suitable communication protocol, preferably a lower-power and short range wireless medium ,example- Bluetooth, Zigbee. Near field communication (NFC). The processing node, which could be a personal Digital Assistant(PDA), smartphone, computer or a custom made processing module



www.ijprems.com editor@ijprems.com

Vol. 03, Issue 02, February 2023, pp : 212-219

based on a microcontroller or a field programmable gate array(FPGA) runs advanced processing , analysis, and decision algorithms and may also store and display the results to the user. It transmits the measured data over the internet to the healthcare personnel, thus functioning as the gateway to remote healthcare facilities. In order to be used for long term monitoring purposes, wearable health monitoring systems need to satisfy certain medical and ergonomic requirements. eg- The system needs to be comfortable, the components should be flexible, small in dimensions and must be chemically inert, and non- toxic, hypo-allergenic to the human body.

Wearable Sensors, being progressively more comfortable and less obtrusive, are appropriate for monitoring an individual's health or wellness without interrupting their daily activities. The sensors can measure several physiological signals/parameters as well as activity and movement of an individual by placing them at different locations of the body. The advancement in low power, compact wearable, inexpensive computing and storage devices coupled with modern communication technologies pave the way for low cost, unobtrusive, and long term health monitoring system.

The usage of the IOT in healthcare (the industry, personal healthcare and healthcare payment applications) has sharply increased across various specific internet of things use cases. The improvement of the healthcare with remote monitoring and tele-monitoring as main applications. A area where numerous initiatives exist is tracking, monitoring and maintenance of assets, using IOT. This is done on the level of medical devices and healthcare assets, the people level and the non- medical asset level (eg. hospital building assets).

The range of IOT applications has become wider, smart, and connected healthcare is crucial one. This can be achieved by wearing sensors or embedded in our abode which panoply information of physical and mental health of patients, information captured on regular basis which brings affirmative changes in present health care scenario.

1.2 USES OF WEARABLE DEVICES

By the use of processing algorithms and data analysis. We can :-

- It diagnose the pulse rate before it will result in heart attacks,"It's better to take prevention than cure". It gives personalized treatment and management.
- It will lead to new possibilities in the digital health ecosystem to achieve a range of health outcomes.
- Sensors monitor physiological data of older people and individuals with chronic conditions can facilitate clinical interactions.

2. METHODOLOGY

2.1 OVERVIEW

'IOT' stands for internet of things is a system of interrelated computing devices, mechanical and digital machines, objects or people that are provided with unique identifiers and the ability to transfer data over a network without requiring human to human or human to computer interaction.

The usage of the IOT in healthcare (the industry, personal healthcare and healthcare payment applications) has sharply increased across various specific internet of things use cases. The improvement of the healthcare with remote monitoring and tele-monitoring as main applications. A area where numerous initiatives exist is tracking, monitoring and maintenance of assets, using IOT. This is done on the level of medical devices and healthcare assets, the people level and the non-medical asset level (eg. hospital building assets).

The range of IOT applications has become wider, smart, and connected healthcare is crucial one. This can be achieved by wearing sensors or embedded in our abode which panoply information of physical and mental health of patients, information captured on regular basis which brings affirmative changes in present health care scenario. By the use of processing algorithms and data analysis. We can:-

- a) It diagnoses the pulse rate rate before it will result in heart attacks, "It's better to take prevention than cure". It gives personalized treatment and management.
- b) It will lead to new possibilities in the digital health ecosystem to achieve a range of health outcomes.
- c) Sensors monitor physiological data of older people and individuals with chronic conditions can facilitate clinical interactions.

2.2 DESIGNING OF HEALTH MONITORING SYSTEMS

- Aurdino Nano
- Wi-Fi module ESP8266-01
- Heart Sensor
- Temperature Sensor LM-35 5



e-ISSN : 2583-1062

5.725


Impact Factor :

www.ijprems.com editor@ijprems.com


Vol. 03, Issue 02, February 2023, pp : 212-219

- LCD(16x2)
- IR Sensor

LAYOUT OF HEALTH MONITORING SYSTEM

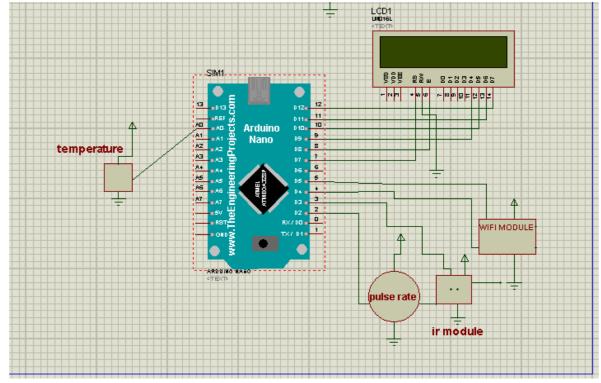

CIRCUIT DIAGRAM OF HEALTH MONITORING SYSTEM

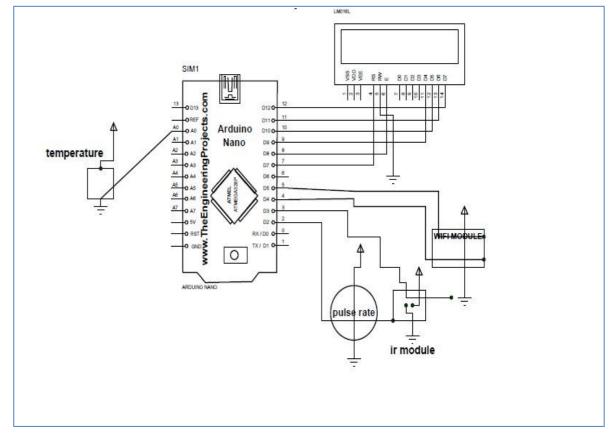



e-ISSN : 2583-1062

> Impact Factor : 5.725

www.ijprems.com editor@ijprems.com

Vol. 03, Issue 02, February 2023, pp : 212-219

esp2_health_final_final Arduino 1.8.5 -
File Edit Sketch Tools Help
esp2_health_final_final
include <liquidcrystal.h></liquidcrystal.h>
LiquidCrystal lcd(6,7,8, 9, 10, 11);//RS,EN,D4,D5,D6,D7
<pre>#include <softwareserial.h></softwareserial.h></pre>
#define DEBUG true
SoftwareSerial esp8266(4,5); // make RX Arduino line is pin 4, make TX Arduino line is pin 5.
#define temperature A0
#define ir 3
volatile unsigned int pulse = 0;
<pre>const byte interruptPin = 2;</pre>
int heartbeat=0, irs=0;
int time_delay =0,sensor=HIGH;
<pre>int heat,button,counter=0,tempr=0,inc=82;</pre>
void setup()
{
Serial.begin(9600);
esp8266.begin(115200); // your esp's baud rate might be different
<pre>pinMode (interruptPin, INPUT);//_FULLUP</pre>
<pre>pinMode(ir, INFUI);</pre>
attachInterrupt(digitalPinToInterrupt(interruptPin), blinkk, FALLING);
pulse = 0;
<pre>lod.begin(16, 2);//initializing LCD</pre>
<pre>lod.print("health monitor");</pre>
Serial.print("health monitor");
Done Saving.
1 Arduino Nano, ATmega32
l 🚞 🙆 🐉 🦉 👩 🕎 👼 🚳 🔊

3. PROGRAMMINGAND ANALYSIS

esp2_health_final_final Arduino 1.8.5	- 🗇 🗙
File Edit Sketch Tools Help	
	P
esp2_health_final_final	
<pre>//lcd.clear(); sendData("A1+RSTI\n",2000,DEBUG); // reset module sendData("A1+CNMODE=2\r\n",1000,DEBUG); // configure as access point sendData("A1+CIFSR\r\n",1000,DEBUG); // configure for multiple connections sendData("A1+CIFSRV=1,200,The for multiple connections</pre>	^
<pre>vol bink() { gulse += 1; }</pre>	
<pre>void health() { lcd.clear(); heat=analogRead(temperature); delay(10); heat=(heat*5)/10.3; // Calculate temperature in Celsuis//10.3 temp=heat; delay(10); irs=digitalRead(ir); if(irs=HIGH) { lcd.setCursor(0,0); lcd.sprint("Pulse is:"); } }</pre>	
<pre>lcd.setCursor(11,0);</pre>	
	Arduino Nano, ATmega328P on COM11 ^ [2:00 PM 5/14/2018



e-ISSN: 2583-1062

> Impact Factor : 5.725

www.ijprems.com editor@ijprems.com

Vol. 03, Issue 02, February 2023, pp : 212-219

He till skach Tota Hep I till skach Tota Hep I till skach I	cutor e ijprems.com	
Image: Section of the section of th	esp2_health_final_final Arduino 1.8.5	- ð ×
<pre>setUpunt.indite stiller.indit stiller.indit stiller.indite st</pre>		
<pre>triangle to the second of the second of</pre>		
<pre>set to the set to</pre>		
<pre>ide_control type: type: ide_control type: i</pre>		r.
ido scalar (Link); Lido scala		
<pre>ide_metase(1); i</pre>		
<pre>ide_control(true; in: "); deleter(in:(in:(in:(in:(in:(in:(in:(in:(in:(in:</pre>		
<pre>idd_strict_time_fol_proj_ idd_strict_ti</pre>		
<pre>id. setMonter(L4.); id. setMonter(L4.); i</pre>		
<pre>start full the set of the se</pre>		
<pre>pint functions: f</pre>		
heatbackers() Lases(Lase()) Lases(else	
<pre>ide_motiver(0,0); ide_motiver(1,0); ide_mot</pre>		
<pre>id_setUres(10.0) i</pre>	<pre>lcd.setCursor(0,0);</pre>	
<pre>id_git[it_time_chi]; id_setClere(Chi); id_s</pre>		
<pre>ld_still("Sec_is"); ld_still("Sec_is"); ld_still("Sec_is"); ld_still("Sec_is"); ld_still("Sec_is"); ltm dsig+r;</pre>	lod.print (heartbeat);	
<pre>ld.mctores(1).1); ld.mcto</pre>		
<pre>1d.metricer(4,1): 1d.metricer(14,1): 1d.metricer(14,1): the delay::; the delay::; the delay::; the delay:::</pre>	lcd.setCursor(11,1);	
<pre>lad.print(time_delay); if control the delay); if control the delay is a control the delay is and the de</pre>		
<pre>ddigy050;; the desyr;;</pre>	<pre>lod.print(time_delay);</pre>	
<pre>tite disyre;</pre>		
Image: Control of the set of the se		v
Image: Control of the set of the se		
Image: Control of the set of the se		
Image: Control of the set of the se		
Image: Control of the set of the se		
<pre>esp2_health_final_final Arduino 1.8.5 - 0 × file fat Stach Tools Help file fat Stach Tools Help esp2_health_final_final esp2_health_final_final Arduino 1.8.5</pre>		2.01 DM
<pre>File Edit Sketch Tools Help File Edit Sketch Tools Help sp2_health_final_final sp2_health_final_fina</pre>		
<pre>File Edit Sketch Tools Help File Edit Sketch Tools Help sp2_health_final_final sp2_health_final_fina</pre>		
<pre>sp2_headh_final_final sp2_headh_final_final sp2_headh_final_final_sp2_headh_final</pre>	esp2_health_final_final Arduino 1.8.5	- 🗇 🗙
<pre>sep2_healh_find_find if(Lime_delay>-25) { keat(); } } void loop() { health(); if(exp2266.available()) // check if the esp is sending a message { if(exp2266.find(*+IPD,**)) { // clay(1000); int connectionId1 = esp8266.read()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String vebpage ; webpage = "NITE/1.1200 @KinContent-Type: text/html\nConnection: close\nRefresh: 5\n\nc!DOCTYPE HTML>\n*; String orbgend = "AI+CIPSEND="; clpSend += "n;"; clpSend += "n;";</pre>	File Edit Sketch Tools Help	
<pre>if(cime_delay>=25) { best(); } } void loop() { beslth(); if(esp2266.available()) // check if the esp is sending a message if(esp2266.find("+IFD,")) (// delay(1000); int connectionId = esp2266.read()-48; // subtract 40 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 40 String webpage ; webpage : webpage : webpage : webpage : wilf(1.000 (K)nContent-Type: text/html\nConnection: close\nRefresh: 5\n\nc!DOCTYPE HIML>\n*; String cipSend = "AI+CIFSEND="; cipSend += ","; cipSend</pre>		
<pre>{ beal(); } } void loop() { bealth(); if(esp2266.available()) // check if the esp is sending a message { if(esp2266.find("+IPD,")) { // delay(1000); int connectionId = esp2266.read()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage : webpage = "HTFP/1.1 200 0K\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HTML> \ndhtml>\n"; String ofgBend = "AT+CIPESIDE"; clpSend += ","; clpSend += ","; clpSend += "n"; sendData(clpSend, =000, DEBUG); // delay(LOO, DEBUG);</pre>		
<pre>best(); } void loop() { health(); if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available()) // check if the esp is sending a message { if(esp2266.available() // check if the esp is sending a message { if(esp2266.available() // check if the espi is sending a message { if(esp2266.available() // check if the espi is sending a message { if(esp2266.available() // check if the espi is sending a message</pre>		^
<pre>> void loop() { helth(); if(esp8266.available()) // check if the esp is sending a message { if(esp8266.find("+IPD,")) { // delay(1000); int connection1d = esp8266.tead()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage : webpage = "HTIP/1.1 200 0K\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HTML> \n<html>\n"; String vebpage = "ATT-CIPENDM="; clpSend = "AT-CIPENDM="; clpSend = "AT-CIPENDM="; clpSend += ","; clpSend += ","; clpSend += ","; clpSend += "\n"; sendData(clpSend); clpSend); clpSend</html></pre>	beat();	
<pre>vid loop() { health(); if(esp2266.available()) // check if the esp is sending a message if(esp2266.available()) // check if the esp is sending a message if(esp2266.ind("+IPD,")) { // delay(1000); int connectionId = esp2266.read()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage = "HTIP/1.1 200 GK(nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HTML> \n<!--mail the connectionId; cipSend += "ATCHESEND="; cipSend += "","; cipSend += "","; cipSend +== heapth(); cipSend += heapth(); cipSend += heapth(); cipSend += heapth(); cipSend += heapth();</td--><td></td><td></td></pre>		
<pre>{ health(); if(esp8266.available()) // check if the esp is sending a message (if(esp8266.find("+IPD,")) { // delay(1000); int connection1d = esp8266.read()-40; // subtract 40 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 40 String webpage ; webpage = "HITP/1.1 200 0K\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!--DOCTYFE HTML-->\n<html>\n"; String cipSend = "AT+CIPSEND="; cipSend += ","; cipSend += ","; cipSend += ","; sendData(cipSend); cipSend += "\Lambda"; sendData(cipSend); cipSend += "\Lambda"; sendData(cipSend); sendData(cipSend);</html></pre>		
<pre>if(esp8266.available()) // check if the esp is sending a message { if(esp8266.find("+IPD,")) { // delay(1000); int connectionId = esp8266.read()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage ; webpage = "HTF/L.1 200 OK\nContent-Type: text/html\nConnection: close\nRefresh: S\n\nc!DOCTYPE HIML>\nChtml>\n"; String cipSend = "ATFCIPSEND="; cipSend += "n"; cipSend += "n"; cipSend += "n"; cipSend += "\true;"; sendData(cipSend,100,DEBUS); // the ASUI decimal starts at associate the starts at a star</pre>		
<pre>{ if(esp8266.find("+IPD,")) { // delay(1000); int connection1d = esp8266.read()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage ; webpage = "HITP/1.1 200 OK\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HIML> \n</pre> tring cipSend = "ArtCIPSEND="; cipSend = "ArtCIPSEND="; cipSend =="n";"; cipSend +="n";"; cipSend +="n";"; sendData(cipSend,="n";")		
<pre>{ // delay(1000); int connectionId = esp8266.read()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage ; webpage = "HITP/1.1 200 OK\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HIML> \n<html>\n"; String cipSend = "AIT+CIFSEND="; cipSend += ","; cipSend += ","; cipSend += "\s\n"; sendData(cipSend,1000,DEBUG); </html></pre>	Construction and a second se	
<pre>int connectionId = esp8266.tead()-48; // subtract 48 because the read() function returns // the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage : "HTTP/1.1 200 0K\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HTML> \n<html>\n"; String cipSend = "AT-CIPESUD="; cipSend += "\n"; cipSend += "\n"; cipSend += "\n"; sendDate (cipSend +="\n"; sendDate (cipSend, +="\n"; se</html></pre>		
<pre>// the ASCII decimal value and 0 (the first decimal number) starts at 48 String webpage ; webpage = "HITP/1.1 200 0K\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HIML> \n<html>\n"; String cipSend = "AT+CIPSEND="; cipSend += connectionId; cipSend += ","; cipSend += ","; cipSend += "\\\\n"; sendData(cipSend,1000,DEBUG);</html></pre>		
<pre>webpage = "HTTP/1.1 200 0K\nContent-Type: text/html\nConnection: close\nRefresh: 5\n\n<!DOCTYPE HTML> \n<html>\n"; String cipSend = "AT+CIPESNB="; cipSend += ","; cipSend +=webpage.length(); cipSend +=webpage.length(); cipSend +="\r\n"; sendData(cipSend,1000,DEBUG);</html></pre>	// the ASCII decimal value and 0 (the first decimal number) starts at 48	
<pre>String cipSend = "AT+CIPSEND="; cipSend += connectionId; cipSend += ","; cipSend +=webpage.length(); cipSend +="\z\n"; sendData(cipSend,1000,DEBUG);</pre>		
<pre>cipSend += ","; cipSend +=webpage.length(); cipSend +="\\\\"; sendData(cipSend,1000,DEBUG);</pre>	String cipSend = "AT+CIPSEND=";	
cipSend +="\r\n"; sendData(cipSend,1000,DEBUG);	cipSend += ",";	
sendData (cipSend, 1000, DEBUG);		
senduata (webpage, 1000, Dibbos);	sendData (cipSend, 1000, DEBUG);	
webpage =" <h1>=====IP HOSPITAL=======";</h1>		
<pre>webpage +="<hl>PATHENT -1:</hl>"; webpage +="<hl>temperature of body=";</hl></pre>	<pre>webpage +="<hl>PATIENT -1:</hl>";</pre>	
webpage == Knippengerer of body= ; webpage == String(tempr);		v
Done Saving.	Done Saving.	
	120	Arduino Nano, ATmega328P on COM11
120 Arduino Nano, ATmega328P on COM11		2:08 PM



e-ISSN : 2583-1062

> Impact Factor : 5.725

www.ijprems.com editor@ijprems.com

Vol.	03,	Issue	02,	February	2023,	pp:	212-219
	,		- ,	, J	,	LL .	-

Edit Sketch Tools Help	esp2_health_final_final Arduino 1.8.5	- 0
sp2_health_final_final		
webpage +=" <hi>pulse rate of patient=";</hi>		
<pre>webpage += String(heartbeat); webpage += "";</pre>		
<pre>cipSend = "AT+CIPSEND="; cipSend += connectionId;</pre>		
cipSend += ",";		
<pre>cipSend +=webpage.length(); cipSend +="\r\n";</pre>		
sendData(cipSend, 1000, DEBUG);		
<pre>sendData(webpage,1000,DEBUG); String closeCommand = "AT+CIPCLOSE=";</pre>		
<pre>closeCommand+=connectionId; // append connection id closeCommand+="\r\n";</pre>		
<pre>sendData(closeCommand, 3000, DEBUG);</pre>		
}		
ring sendData(String command, const int timeout, boole	an debug)	
String response = "";		
<pre>esp8266.print(command); // send the read character t</pre>	o the esp8266	
<pre>long int time = millis();</pre>		
<pre>while((time+timeout) > millis())</pre>		
<pre>{ while (esp8266.available())</pre>		
ne Saving.		
		Arduino Nano, ATmega328P on CO
🚔 🥝 🗛 🔩 🚺 🖳	🖻 💿 🚳 🛛 🔤 🖉	▲ R and 2:09 P
	esp2_health_final_final Arduino 1.8.5	
lie Edit Sketch Tools Help		
		2
		a
ie Edit Sketch Tools Help		۵ ۲
sp2_heith_final_final_fi	serial window	<u>م</u> -
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact</pre>		<u>م</u> ۲
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c;</pre>		ع •
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp8266.read(); // read the next charact</pre>		2) •
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp8266.read(); // read the next charact response:=c; } if(debug)</pre>		ع ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response:=c; } }</pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact responset=c; } } if(debug) { Serial.print(response); }</pre>		ם ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } } if (debug) { Serial.print (response); } return response;</pre>		ם ◄
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } } if(debug) { Serial.print(response); } return response;</pre>		ع ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response:=c; } } if(debug) { Serial.print(response); } return response; void beat()</pre>		ع ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } if(debug) { Serial.print(response); } return response; void beat() if((heartbeat<50) (heartbeat<100))</pre>		ع ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response:=c; } if (debug) { Serial.print(response); } return response; roid beat()</pre>		<u>م</u> ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response:=c; } if (debug) { Serial.print(response); } return response; oid beat() if((heartbeat<50)) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } </pre>		<u>م</u> ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } if (debug) { Serial.print(response); } return response; roid beat() if ((heartbeat<50) (heartbeat<100)) { inc-inc+2; heartbeat-inc; }</pre>		<u>م</u> ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response:=c; } } if (debug) { Serial.print(response); } return response; void beat() if ((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { </pre>		<u>م</u> ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact responset=c; } } if (debug) { Serial.print(response); } return response; roid beat() if ((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat-pulse;</pre>		ع ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } if(debug) { Serial.print(response); } return response; } rotid beat() { if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0;</pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response=c; } } if(debug) { Serial.print(response); } return response; return response; return response; return response; } return response; } if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0; pulse = 0 ;</pre>		ع ٦
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } if(debug) { Serial.print(response); } return response; } rotid beat() { if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0;</pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } if(debug) { Serial.print(response); } return response; poid beat() { if((heartbeat<50)))(heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0; pulse = 0; } }</pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response+=c; } f(debug) { Serial.print(response); } return response; } rold beat() { if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0; pulse = 0; </pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response:=c; } if(debug) { Serial.print(response); } return response; void beat() if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0; pulse = 0; }</pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response=c; } if(debug) { Serial.print(response); } return response; void beat() if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0; pulse = 0; } </pre>		
<pre>esp2_health_final_final { // The esp has data so display its output to the char c = esp2266.read(); // read the next charact response=c; } if(debug) { Serial.print(response); } return response; void beat() if((heartbeat<50) (heartbeat<100)) { inc=inc+2; heartbeat=inc; } else { heartbeat=pulse; } time_delay = 0; pulse = 0; } </pre>		Aduine Nane, ATmega328P en COM1



www.ijprems.com

editor@ijprems.com


INTERNATIONAL JOURNAL OF PROGRESSIVE RESEARCH IN ENGINEERING MANAGEMENT AND SCIENCE (IJPREMS)

Vol. 03, Issue 02, February 2023, pp : 212-219

e-ISSN : 2583-1062

> Impact Factor : 5.725

0	heartbeat_and_temperature Arduino 1.8.5	- 0 ×
File Edit Sketch Tools Help		
		Q
heartbeat_and_temperature	📾 COM9 (Arduino/Genuino Uno) – 🗆 🗙	
<pre>#define interruptPin 2 // for define heartbeat pin #define temperature A0 int heat; int pulse = 0; // variable int time_delay =0; // variable void setup() { pinMode(interruptPin, INPUT); Serial.begin(9600); //for communication 9600 Serial.println("READY"); Serial.println("READY"); Serial.println("developed by shrui"); serial.println("d</pre>	Send Pulse is :29 temperature is :23.C Pulse is :72 temperature is :28.C	
<pre>heat=analogRead(temperature); delay(10); heat=(heat*)/10.3; // Calculate temperature in Celsuis delay(995); time_delay++; if(time_delay>= 25){ Serial.print("Pulse is :"); Serial.print("temperature is :"); Serial.print("temperature is :"); Serial.print(heat); Serial.print(heat);</pre>	Autoscroll Both NL & CR v 9600 baud v Clear output	
Done uploading		
Sketch uses 3310 bytes (10%) of program storage space. Maxim Global variables use 310 bytes (15%) of dynamic memory, leav.	ing 1730 bytes for local variables. Maximum is 2048 bytes.	
		uduino/Genuino Uno on COM9
📋 🤄 🕹 🔮 🍯 🚳 🔤		▲ 🏴 🏭 10:44 AM 2/25/2018

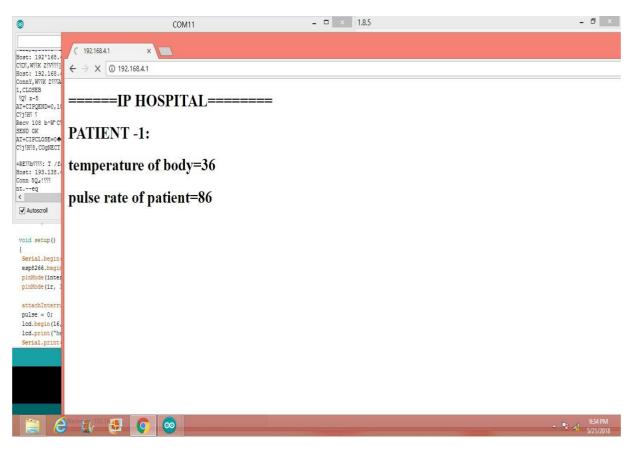



2583-1062 Impact Factor : 5.725

e-ISSN:

editor@ijprems.com

Vol. 03, Issue 02, February 2023, pp : 212-219

4. CONCLUSION

Researchers across the world have started to explore various technological solutions to enhance healthcare provision in a manner that complements existing services by mobilizing the potential of the IOT. This report includes diverse aspects of IOT based healthcare technologies and present various applications of IOT based devices in healthcare showing up and their advantages with technical specifications and platforms that support access to the IOT backbone and facilitate medical data transmission and reception. Substantial R&D efforts have been made in IOT-driven healthcare services and applications. This report is concerning how the IOT can address pediatric and elderly care, chronic disease supervision, private health, and fitness management.

5. REFERENCES

- [1] Moeen Hassanalieragh, Alex Page, Tolga Soyata, Gaurav Sharma, Mehmet Aktas, Gonzalo Mateos Burak Kantarci, Silvana Andreescu," Health Monitoring and Management Using Internet-of-Things (IoT) Sensing with Cloud-based Processing: Opportunities and Challenges", 2015 IEEE International Conference on Services Computing.
- [2] Alexandros Pantelopoulos and Nikolaos G. Bourbakis," A Survey on Wearable Sensor-Based Systems for Health Monitoring and Prognosis", IEEE Transactions on systems, man, and cybernetics Part C: Applications and reviews, Vol. 40, No. 01, January 2010.
- [3] Arsalan Mosenia, Susmita Sur-Kolay, Anand Raghunathan and Niraj K. Jha," Wearable Medical Sensor-Based System Design: A Survey", IEEE Transactions on multi-scale computing systems, vol. 3, No. 2, April-June 2017.
- [4] Suriya Begum, Venugopal ," Comparison of various techniques in IoT for healthcare systems", International Journal of Computer Science and Mobile Computing, Vol.5 Issue 3, March- 2016.
- [5] S.M.Riazul Islami, Daehan Kwak, MD. Humaun Kabir, Mahumd Hossain, AND Kyungsup Kwak," The Internet of Things for Health Care: A Comprehensive Survey", 2015 IEEE. Translations and content mining are permitted for academic research only.
- [6] Stephanie B. Baker, Weixiang, and Ian Atkinson," Internet of Things for Smart Healthcare: Technologies, Challenges, and Opportunities", 2017 IEEE. Translations and content mining are permitted for academic research only.
- [7] MD. Mofijul, Islam, MD. Abdur Razzaque, Mohammed Mehedi Hassan, Walaa Nagyi Ismail, and Biao Song," Mobile Cloud-Based Big Healthcare Data Processing in Smart Cities", 2017 IEEE. Translations and content mining are permitted for academic research only.
- [8] Shao-Jie Hsu, Shih-Syun Lin, Tun-Wen Pa, Hamido Fujita," Proactive Healthcare and an Early Warning Mechanism for Coronary Artery Disease Patients using Internet-of- Thing Devices", 2016 IEEE International Conference on Systems, Man, and Cybernetics' SMC 2016 October 9-12,2016.
- [9] Akshay Gapchup, Ankit Wani, Durvesh Gapchup, Shashank Jadhav," Health Care Systems Using Internet of Things", International Journal of Innovative Research in Computer and Communication Engineering, Vol. 4, Issue 12, December 2016.
- [10] Divya Saxena, and Vaskar Raychoudhury, "Design and Verification of an NDN- Based Safety-Critical Application: A Case Study with Smart Healthcare", IEEE 2017.
- [11] Ms.Kalyani D Shinde, Prof. Sagar B. Shinde, Prof. S. S. Savkare," A Review on system of IOT Based Human Activity Monitoring By Using Raspberry Pi", http://www.ijarsmt.com Volume 2, Issue 6, June 2016.
- [12] Divya Saxena, and Vaskar Raychoudhury," Design and Verification of an NDN- Based Safety-Critical Application: A Case Study with Smart Healthcare", IEEE Transactions on systems, man, and cybernetics: Systems.
- [13] Prosanta Gope and Tzonelih Hwang,"BSN-Care: A Secure IoT-Based Modern Healthcare System Using Body Sensor Network" IEEE Sensors Journal", Vol. 16, No. 5, March 01, 2016.
- [14] Kenji Aono, Nizar Lajnef, Fred Faridazar and Shantanu Chakrabartty," Infrastructural Health Monitoring Using Self-powered Internet-of-Things ",2016 IEEE.