

## IOT BASED FLOOD MONITORING AND ALERTING SYSTEM

Mr. V. Nagamani<sup>1</sup>, A. Padmavathi<sup>2</sup>, G. V. Swathi<sup>3</sup>, S. M. Sony<sup>4</sup>

<sup>1,2,3,4</sup>Department Of Electronics and Communication Engineering, Santhiram Engineering College  
(Autonomous), Nandyal, India.

DOI: <https://www.doi.org/10.58257/IJPREMS33512>

### ABSTRACT

This project proposes an innovative IoT-based flood detection system utilizing ultrasonic sensors, SIM800 modules, and buzzers, with software development carried out in Arduino IDE and C++. The system aims to monitor water levels in rivers or other bodies of water in real-time, employing ultrasonic sensors to detect changes in water levels. Data is transmitted to an IoT cloud platform for analysis and alert generation. Three predefined levels of water rise are incorporated, each corresponding to different flood intensities, with the buzzer emitting distinct frequencies as thresholds are surpassed. Moreover, the system triggers SMS alerts and calls to relevant authorities, ensuring timely notifications. Leveraging IoT technology enhances scalability and accessibility, facilitating remote monitoring and management. Cloud computing enables real-time analysis of large datasets, fostering proactive measures to safeguard communities and infrastructure. Overall, this project contributes to enhancing early warning systems for floods, offering a robust and reliable solution for diverse environmental conditions. Key words include IoT, flood detection, ultrasonic sensor, SIM800, Arduino IDE, Rain sensor, Amplifier C++, early warning system, real-time monitoring, and alert mechanism.

### 1. INTRODUCTION

Floods are among the most devastating natural disasters, causing widespread destruction to infrastructure, homes, livelihoods, and loss of lives globally. With climate change leading to increased frequency and severity of extreme weather events, the need for effective flood monitoring and early warning systems has become paramount. In response to these challenges, innovative technologies such as the Internet of Things (IoT) offer promising solutions for early flood detection, alerting, and mitigation. The Internet of Things (IoT) is a revolutionary concept that involves connecting physical devices, sensors, and systems to the internet, enabling them to communicate, collect data, and interact with each other autonomously. By leveraging IoT technology, flood monitoring systems can be developed to provide real time data on water levels, rainfall intensity, and weather conditions in flood-prone areas. This data is crucial for early detection of potential flooding events and timely dissemination of warnings to at-risk communities.

### 2. METHODOLOGY

The flood detection system proposed in this project. leverages a combination of hardware and software components. Hardware includes ultrasonic sensors, SIM800 modules, and buzzers, while software development is carried out using Arduino IDE and C++.

1. \*Hardware Setup:\* Ultrasonic sensors are deployed to monitor water levels in rivers or other bodies of water. These sensors detect changes in water levels, which are crucial for flood detection. SIM800 modules are utilized for data transmission, enabling communication with an IoT cloud platform. Buzzers are integrated to emit distinct frequencies based on predefined levels of water rise.

2. \*Software Implementation:\* Arduino IDE and C++ are employed for software development. The Arduino IDE provides a user-friendly interface for programming Arduino boards, making it suitable for developing embedded systems like the flood detection system. C++ programming language is used for more advanced functionalities and algorithm implementation.

3. \*Real-time Monitoring and Alert Generation:\* Data collected from ultrasonic sensors are transmitted to an IoT cloud platform for analysis and alert generation. The system incorporates three predefined levels of water rise, each corresponding to different flood intensities. As water levels surpass each threshold, the buzzer emits distinct frequencies to indicate the severity of the situation. Additionally, the system triggers SMS alerts and calls to relevant authorities, ensuring timely notifications to mitigate potential damages.

4. \*Leveraging IoT Technology:\* IoT technology enhances the system's scalability and accessibility, allowing for remote monitoring and management. Data collected by the system can be stored and analyzed in the cloud, enabling real-time analysis of large datasets. This facilitates proactive measures to safeguard communities and infrastructure by providing actionable insights in real-time. Overall, the proposed methodology combines hardware and software

components to develop a robust and reliable flood detection system capable of real-time monitoring and alerting in diverse environmental conditions.

#### Proposed system:

The proposed flood detection system utilizes a combination of hardware components such as ultrasonic sensors and SIM800 modules, alongside software development conducted in Arduino IDE using the C++ programming language. It aims to monitor changes in water levels in rivers or other bodies of water in real-time.

The system incorporates predefined levels of water rise, each corresponding to different flood intensities. As the water level surpasses these thresholds, the buzzer emits distinct frequencies to indicate the severity of the situation. Additionally, the system is designed to trigger SMS alerts and calls to relevant authorities, ensuring timely notifications in case of potential flooding.

By leveraging IoT technology, the system enhances scalability and accessibility, allowing for remote monitoring and management. Data collected by the sensors is transmitted to an IoT cloud platform for analysis, enabling real-time processing of large datasets. This facilitates proactive measures to the impact of floods and protect communities and infrastructure.

In summary, the proposed system aims to enhance early warning systems for floods by providing a robust and reliable solution that can adapt to diverse environmental conditions. Key components and technologies involved include IoT, ultrasonic sensors, SIM800 modules, Arduino IDE, C++ programming, real-time monitoring, and alert mechanisms.


#### Existence system:

The existing flood detection systems typically employ a variety of sensors such as water level sensors, flow sensors, or weather sensors to monitor environmental conditions that may lead to flooding. These systems often utilize wired or wireless communication protocols to transmit data to a central monitoring station or a cloud-based platform for analysis.

Some existing systems may also incorporate predictive modeling and data analytics to forecast potential flooding events based on historical data

and current environmental parameters. Additionally, they may have alert mechanisms in place, such as sirens, text message notifications, or automated phone calls to notify authorities and residents of impending flood risks. However, compared to the proposed system, existing systems may lack the integration of IoT technology and the use of ultrasonic sensors for real-time water level monitoring. They may also have limitations in terms of scalability, accessibility, and the ability to provide timely and accurate alerts in diverse environmental conditions. Overall, while existing flood detection systems provide valuable tools for monitoring and mitigating flood risks, there is room for improvement in terms of leveraging emerging technologies and enhancing the robustness and reliability of early warning systems.

#### BLOCK DIAGRAM:

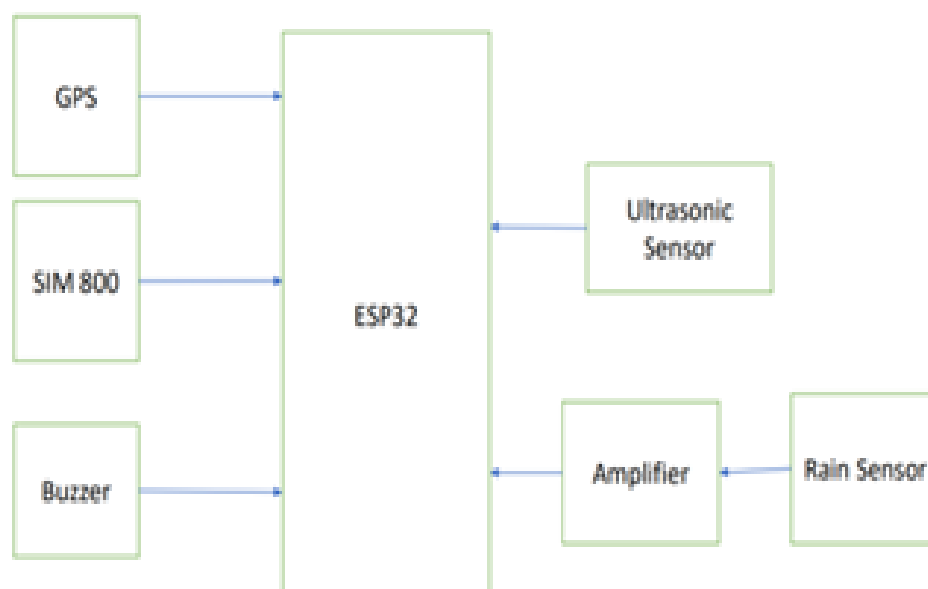

**ESP32:**



The ESP32's coordinates security highlights, counting secure boot, streak encryption, and cryptographic equipment increasing speed, upgrade information judgment and privacy, making it appropriate for applications requiring strong security measures. With its compact estimate, reasonableness, and wealthy include set, the ESP32 has picked up ubiquity in different businesses, counting domestic computerization, savvy gadgets, mechanical robotization, wearables, and more. Its broad community bolster, documentation, and libraries contribute to its broad selection and proceeded advancement for inventive IoT arrangements. Utilizing the ESP32 for surge observing and cautioning could be a great idea due to its capabilities. You'll be able utilize its built-in Wi-Fi to put through to the internet and send information to a server or cloud stage where surge levels can be checked in real-time. Moreover, you'll utilize sensors such as water level sensors or rain gages to identify changes in water levels and trigger cautions in the event that they surpass certain edges. The ESP32's moo control utilization and ability to run on batteries make it appropriate for inaccessible observing applications, where get to to control may be restricted. With the proper programming and sensor setup, you'll make an successful surge observing and cautioning framework utilizing the ESP32.

**Sim 800:**



The SIM800 is a popular GSM/GPRS module designed for mobile communication and IoT applications. It supports quad-band GSM/GPRS frequencies, enabling worldwide compatibility for voice and data transmission. With its compact size and low power consumption, the SIM800 is suitable for battery operated devices and remote monitoring systems. It features UART communication for easy integration with microcontrollers like Arduino and Raspberry Pi. The module supports SMS and GPRS data transmission, allowing for remote control and monitoring applications. Additionally, the SIM800 includes features such as caller ID, call waiting, and call forwarding, enhancing its functionality for voice communication. It offers built-in TCP/IP stack for internet connectivity, enabling applications like HTTP, FTP, and MQTT. The SIM800 module supports SIM card operations, including reading SMS messages and managing phonebook entries. It is widely used in applications such as vehicle tracking systems, security alarms, and remote monitoring devices. The SIM800 module's affordability, reliability, and ease of use make it a popular choice for various IoT and communication projects.

**Ultrasonic Sensor:**



The ultrasonic sensor could be a flexible and broadly utilized gadget in different applications, counting separate estimation, protest discovery, and liquid level detecting. Here's a comprehensive diagram of ultrasonic sensors:



#### 1. Guideline of Operation:

Ultrasonic sensors utilize the guideline of echolocation, comparable to bats and dolphins. They transmit high-frequency sound waves (ultrasonic beats) and degree the time it takes for the waves to reflect off an question and return to the sensor.

#### 2. Transmitter and Collector:

An ultrasonic sensor regularly comprises of a transmitter and a collector. The transmitter emanates ultrasonic waves, whereas the collector recognizes the waves after they bounce off an protest.

#### 3. Separate Estimation:

One of the essential applications of ultrasonic sensors is remove estimation. By calculating the time taken for the ultrasonic waves to travel to the protest and back, the sensor can decide the separate to the protest precisely.

#### 4. Location Run:

Ultrasonic sensors can distinguish objects at shifting separations, depending on variables such as the sensor's recurrence, control, and affectability. Common discovery ranges run from a few centimeters to a few meters.

Exactness and Determination: Ultrasonic sensors offer tall precision and determination in remove estimation, making them reasonable for exact applications such as mechanical technology, robotization, and level detecting.

#### 6. Pillar Design:

Ultrasonic sensors transmit sound waves in a cone shaped or round and hollow design, covering a wide zone before the sensor. The shape of the pillar design decides the sensor's field of see and location range.

#### 7. Natural Contemplations:

Ultrasonic sensors perform well in different natural conditions, counting obscurity, clean, and haze. Be that as it may, components such as temperature, mugginess, and discuss thickness can influence their execution.

#### 8. Applications:

Ultrasonic sensors discover applications in various businesses, counting car (stopping help frameworks), mechanical mechanization (question discovery and situating), healthcare (non-contact liquid level detecting), and shrewd domestic gadgets (movement discovery and inhabitation detecting).

#### **Buzzer:**

A buzzer is an electroacoustic transducer that converts electrical signals into audible sound waves, commonly utilized in electronic devices for providing alerts or notifications. Operating on principles of electromagnetic or piezoelectric transduction, buzzers generate sound by moving a diaphragm or deforming a piezoelectric crystal in response to an applied electrical signal. Available in active and passive

variants, buzzers differ in their ability to produce sound independently or requiring an external oscillator circuit. They operate within specified voltage and current ranges, emitting sound with varying characteristics such as frequency, pitch, and volume. Buzzers are integral components in alarm systems, electronic gadgets, automotive devices, and industrial equipment, indicating events like warnings, errors, or user inputs audibly.

With mounting options ranging from surface-mount to through-hole configurations, buzzers offer versatility in integration across different applications. Considerations for environmental resilience, temperature tolerance, and acoustic performance guide the selection of buzzers to ensure reliable operation under diverse conditions. Overall, buzzers play a vital role in enhancing the usability, safety, and functionality of electronic devices by providing audible feedback and alerts to users.

**Rainfall sensor:**

A precipitation sensor, moreover known as a rain gage or pluviometer, could be a gadget utilized to degree the sum of precipitation, such as rain, that falls at a particular area over a period of time. It regularly comprises of a container or pipe framework outlined to gather water, which is at that point measured utilizing different strategies, such as manual readings, mechanical components, or electronic sensors. Precipitation sensors are basic devices in meteorology, hydrology, and natural checking, giving important information for climate estimating, water asset administration, and logical inquire about.

**3. CONCLUSION**

The IoT-based flood detection system presented in this project offers a comprehensive solution for early detection and alerting of flood risks. By leveraging ultrasonic sensors, SIM800 modules, and buzzers, coupled with Arduino IDE and C++ programming, the system monitors water levels in real time. Through predefined thresholds, it categorizes flood intensities and emits distinct alerts, while also triggering SMS notifications and calls to authorities. The integration of IoT technology enhances scalability and accessibility, enabling remote monitoring and cloud-based data analysis for timely action. Overall, this project contributes significantly to enhancing early warning systems for floods, empowering communities to proactively mitigate potential damages and safeguard lives and infrastructure.

**4. REFERENCES**

- [1] M. E. Colbeck, "Farther detecting of snowmelt-induced flooding utilizing manufactured gap radar," in Procedures of the IEEE Universal Geoscience and Inaccessible Detecting Symposium, 2000, pp. 1996-1998.
- [2] S. Chandra, H. Althaus, and C. G. Kilsby, "Surge immersion displaying utilizing completely energetic 2D water powered and hydrodynamic models," in Procedures of the 5th IAHR Symposium on Stream, Coastal and Estuarine Morphodynamics, 2005, pp. 1-8.
- [3] G. Di Baldassarre, et al., "A show for the estimation of surge risk in alluvial fields through dike breaches," in Procedures of the 33rd IAHR Congress: Water Designing for end Of, the 2009, pp. 1-10.
- [4] R. M. Hirsch, "Hydrologic viewpoints on streak flooding: understanding, determining, and moderating," in Procedures of the National Surge Recurrence Workshop, 2015, pp. 1-15.5. J. D. Creutin and V. K. Gupta, "Evaluation of downscaling strategies for anticipating every day streams utilizing common circulation models," in Procedures of the IAHS-IAPSO-IASPEI Gathering, 2013, pp. 1-12.
- [5] P. J. Ward and M. C. A. van cave Bergh, "The part of protections in decreasing surge chance," in Procedures of the 2nd Universal Conference on Surge Hazard Administration, 2010, pp. 1-8.
- [6] S. D. Guikema and C. M. Jonkman, "Evaluating surge harm to framework: a relapse approach," in Procedures of the 5th Universal Symposium on Surge Resistance, 2016, pp. 1-10.
- [7] R. J. Dawson and S. A. Cleric, "Financial examination of surge harm in urban ranges: a survey of hypothesis and strategies," in Procedures of the Worldwide Conference on Surge Chance Administration, 2014, pp. 1-9.
- [8] M. E. Whittlesey, et al., "Creating a comprehensive approach to surge chance evaluation and administration," in Procedures of the International Conference on Surge Strength, 2017, pp. 1-11.
- [9] B. Merz and K. L. Vogel, "Surge chance administration: a comprehensive approach," in Procedures of the World Natural and Water Assets Congress, 2012, pp. 1-10.